Disassembling Sony Cyber-shot DSC-W230 Exterior Case

Removing the camera's exterior case.

Written By: Alex



© iFixit — CC BY-NC-SA

INTRODUCTION

This guide will explain how to take off the camera's exterior case.

TOOLS:

- 64 Bit Driver Kit (1)

Step 1 — Disassembling Sony Cyber-shot DSC-W230 Exterior Case



- Begin by placing the camera upside down and removing the three small center screws.
- All screws are the same size and length and can be used interchangably.

Step 2






- Turn the camera on its side (Counterclockwise). Remove the two small screws on either side of the silver panel.
- Turn the camera 180 degrees onto its other side and remove the two small screws on either side of the silver panel.

© iFixit — CC BY-NC-SA

Step 3

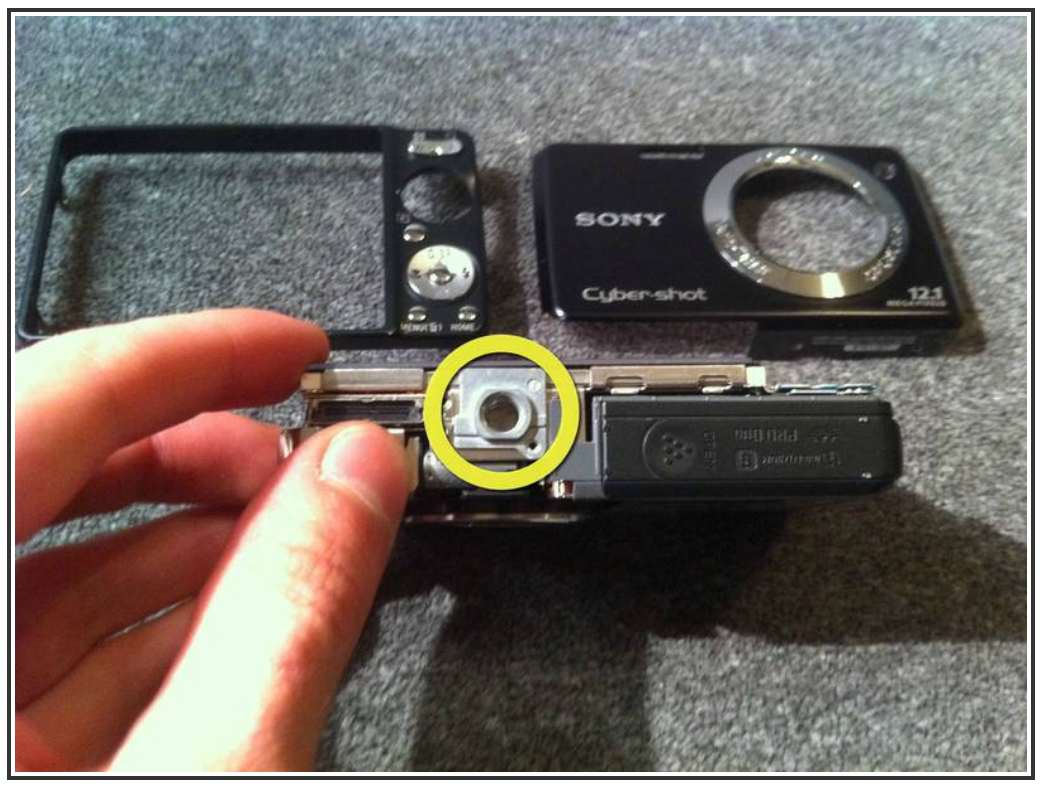





- Locate the camera's tripod mount located on the bottom of the camera.
- Carefully remove the camera's tripod mount and place it aside.
- Be careful not to lose this piece.
- Rotate the silver panel labeled 4x clockwise.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-09 12:41:53 PM.

© iFixit — CC BY-NC-SA